
Art.-Nr. 733054

Power distributor
Multiple socket tower 480 mm, 3,680 W, 4.8 W, 3,000 K, grey



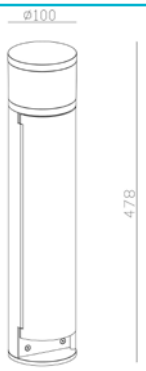

Sometimes it‘s about more than just light. With our multiple socket tower, available with or without light, another gap in our range is filled. Design your garden even more flexibly, in proven DEKO-LIGHT quality of course and at a price that won't break the bank.

Special features

- Safe power distribution outdoors
- Total load max. 3,680 W
- Outlets and lights can be switched on separately
- Connection box with IP67 and accessories including in scope of delivery
- Feed-through wiring possible

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Colour of Lens	White
Scope of Application	Unprotected outdoor areas that can be walked on, not driven on, Covered or partially covered, covered or partially covered, drivable outdoor areas, Living areas in the private sector, Restaurants, bistros, hotel rooms, lobbies, hotel corridors, dining rooms with public traffic
Through Wiring possible	Yes
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting
UV resistance	Yes
Functions	Light and socket can be switched separately
Protection Class	Protection class I/ protective grounding
Rated Input	4.8 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Rated Current	16 A
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box IP67
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	150 lm
Luminous Efficiency	31.3 lm/W
Rated Angle of Reflection	360 Degree
Distribution Characteristic 120°	NDLS
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Side
Height	478 mm
Diameter	100 mm
Working Temperature	-20 to 50 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 44
Max. units per MCB B10	26 PCS
Max. units per MCB B16	41 PCS
Max. units per MCB C10	42 PCS
Max. units per MCB C16	68 PCS
Life Time L70 / B50	25000 h
Switching Cycles	100000
Power Consumption	5 kWh/1000h
EEI	F

Deko-Light Elektronik-Vertriebs GmbH
Auf der Hub 2 | D-76307 Karlsbad
www.deko-light.com
deko@deko-light.com