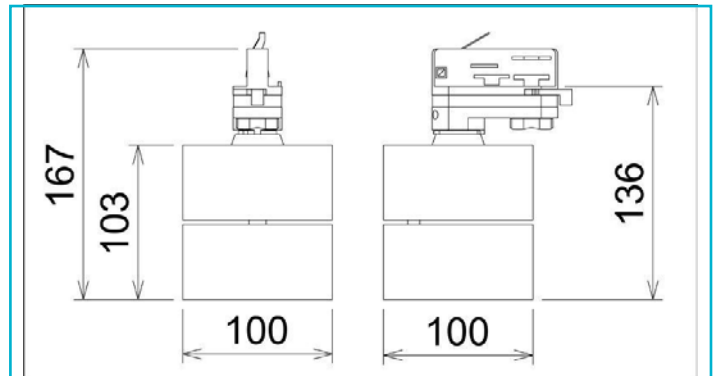


Three-phase spotlight
Uni 2 Tilt, 17 W, DIM, 3000 K, white

Special features

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Phase switch
Protection Class	Protection class I/ protective grounding
Rated Input	17 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90
Rated Luminous Flux	1110 lm
Luminous Efficiency	65 lm/W
Rated Angle of Reflection	36 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct

Light direction	Below
Height	167 mm
Diameter	100 mm
Product weight	852 g
Working Temperature	-10 to 55 °C
Storage Temperature	-20 to 60 °C
IP Protection Class	IP 20
Max. units per MCB B10	100 PCS
Max. units per MCB B16	160 PCS
Max. units per MCB C10	100 PCS
Max. units per MCB C16	160 PCS
Life Time L70 / B50	20000 h
Switching Cycles	10000 PCS
Power Consumption	17 kWh/1000h
EEL	G

