Art. no. 342240

Pendant lamp Slim, 15 W, DIM, 2,700 K, white

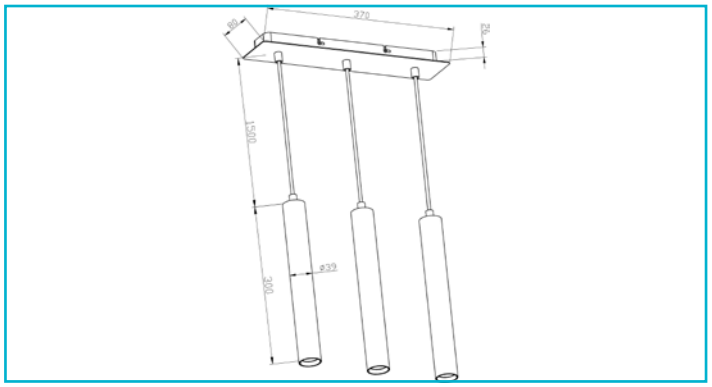

SLIM series lights include single-luminaire and triple-luminaire pendant lamps and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants (300 × 39 mm). Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.

Special features

- extra-soft fabric cable
- glare-free thanks to low UGR value (<19)
- slim design with just 39 mm diameter
- incl. silver-coloured reflector ring

Housing Material	Aluminium
Housing Color	White
Material of Lens	PMMA
Colour of Lens	Transparent
Surface Structure of Lens	Structured
Protection Class	Protection class I/protective grounding
Rated Input	15 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Light Source	LED, Light source changeable TC
Color Temperature	2700 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	1500 lm
Rated Angle of Reflection	24 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Light Exit Surfaces	3
Light characteristics	Direct
Light direction	Below
Height	300 mm
Diameter	39 mm
Base length	370 mm
Base width	80 mm
Base height	26 mm
Pendulum Length max.	1800 mm
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 65 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	15 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

Deko-Light Elektronik-Vertriebs GmbH
Auf der Hub 2 | D-76307 Karlsbad
www.deko-light.com
deko@deko-light.com