


HERO
19358

ANETA
LIGHTING
LIGHTS FOR HOME AND WORK SINCE 1947

www.aneta.se
www.aneta.no

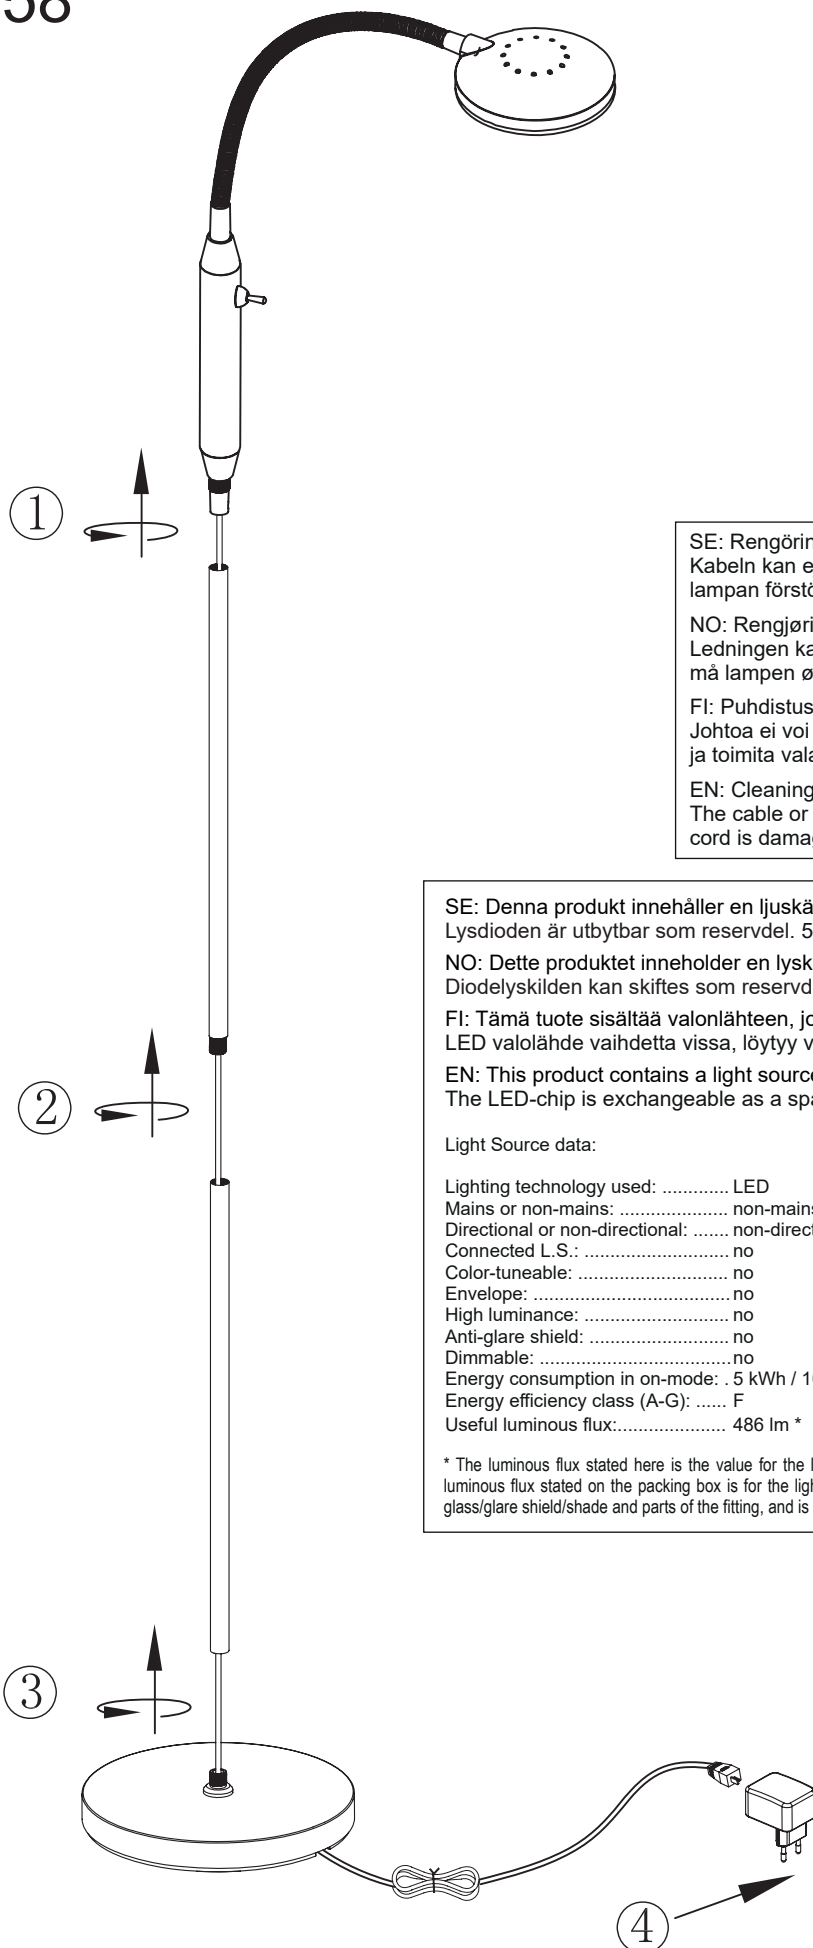

SE: Rengöring: Torkas med torr trasa.
Kabeln kan ej bytas ut. Om kabeln på lampan blir skadad skall lampan förstöras och lämnas till återvinningsstation.

NO: Rengjøring: Tørkes av med tørr klut.
Ledningen kan ikke skiftes. Hvis ledningen til lampan blir skadet må lampan ødelegges og leveres til gjenvinningsstasjon.

FI: Puhdistus: Pyyhi kuivalla liinalla.
Johtoa ei voi vaihtaa. Jos johto on vahingoittunut tuhoa valaisin ja toimita valaisin kierrätyspisteeseen.

EN: Cleaning: Wipe with a dry cloth.
The cable or cord of this luminaire cannot be replaced. If the cord is damaged the luminaire shall be left to recycling.

SE: Denna produkt innehåller en ljuskälla med energieffektivitetsklass F. Lysdioden är utbyttbar som reservdel. 50000 tim ≈ 20 år (6 tim/dag)

NO: Dette produktet inneholder en lyskilde med energieffektivitetsklasse F. Diodelyskilden kan skiftes som reservdel. 50000 tim ≈ 20 år (6 tim/dag)

FI: Tämä tuote sisältää valonlähteen, joiden energiatehokkuusluokka on F. LED valolähde vaihdetta vissa, löytyy varaosana. 50 000 tuntia ≈ 20 vuotta (6 t/päivä)

EN: This product contains a light source of energy efficiency class F. The LED-chip is exchangeable as a spare part. 50000 h ≈ 20 years (6 h/day)

Light Source data:

Lighting technology used:	LED	CCT colour temperature:.....	3000 K
Mains or non-mains:	non-mains	On-mode power:	4,6 W
Directional or non-directional:	non-directional	Stand-by power:	N/A
Connected L.S.:	no	Networked standby power:	N/A
Color-tuneable:	no	CRI:	≥ 80
Envelope:	no	R9 color rendering index:	1
High luminance:	no	sdcM:	< 6
Anti-glare shield:	no	Chromaticity coordinates (X, Y): ...	0.440, 0.403
Dimmable:	no	Lifetime L ₇₀ B ₅₀ :	50 000 hours
Energy consumption in on-mode: .	5 kWh / 1000 h	Lumen maintenance factor:	0.90
Energy efficiency class (A-G):	F	Survival factor:	0.96
Useful luminous flux:.....	486 lm *	Power supply input:	0,3A ~15,3VDC

* The luminous flux stated here is the value for the light source itself in accordance with Regulation (EU) 2019/2015. The luminous flux stated on the packing box is for the lighting fitting, where the light from the light source is partly absorbed by glass/glare shield/shade and parts of the fitting, and is therefore lower than for the light source.