


211

Φ

59

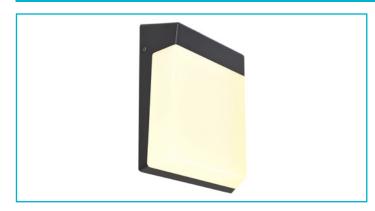

The elegant GIANFAR outdoor wall light boasts an equally traditional and expressive design. Practical: With the included label set, you can change the GIANFAR into a house number light quickly and easily.

- **Special features**
- Base L x W x H: 145 x 17 x 73 mm •

161

Suitable as a house number light •

| Housing Material<br>Housing Color<br>Material of Lens | Die-cast aluminium<br>Gray<br>Plastic   | Switching Cycles<br>Power Consumption<br>Energy Efficiency Class | 20000<br>13 kWh/1000h<br>G   |
|---|---|--|------------------------------|
| Protection Class                                      | Protection class I/protective grounding |  |                              |
| Rated Input   | 13 W                                    |  |                              |
| Rated Input Voltage min./max.<br>Frequency            | 100-240 V/AC 50 / 60 Hz                 |  |                              |
| Power Supply Unit incl.                               | Yes                                     |  |                              |
| Connection Type                                       | Clamp                                   |  |                              |
| Control   | No                                      |  |                              |
| Motion Detector                                       | No                                      |  |                              |
| Light Source  | LED, Light source not changeable        |  |                              |
| Color Temperature                                     | 3000 K                                  |  |                              |
| Colour Consistency                                    | 6 SDCM                                  |  |                              |
| Colour Rendering Index (Ra)                           | 80                                      |  |                              |
| Rated Luminous Flux                                   | 930 lm                                  |  |                              |
| Rated Angle of Reflection                             | 120 Degree                              |  |                              |
| Light Distribution                                    | Symmetric                               |  |                              |
| Distribution Characteristic<br>120°                   | DLS                                     |  |                              |
| Light Exit Surfaces                                   | 1                                       |  |                              |
| Light characteristics                                 | Direct                                  |  |                              |
| Light direction                                       | Front                                   |  |                              |
| Depth   | 161 mm                                  |  |                              |
| Width   | 59 mm                                   |  |                              |
| Height  | 211 mm                                  |  |                              |
| Working Temperature                                   | -20 to 40 °C                            |  |                              |
| Storage Temperature                                   | -10 to 60 °C                            |  |                              |
| IP Protection Class                                   | IP 54                                   |  |                              |
| Life Time L70 / B50                                   | 30000 h                                 |  |                              |
| Deko-Light Elektronik-Vertriebs GmbH                  |   |  | 19.01.202                    |
| Auf der Hub 2   D-76307 Karlsbad                      |   |  | Subject to technical changes |

www.deko-light.com deko@deko-light.com