Art. no. 565408

Recessed ceiling light Slim, 5 W, DIM, 2,700 K, white

DEKOLIGHT

SDCM<3 | Ra>90 | UGR<19 | NEW

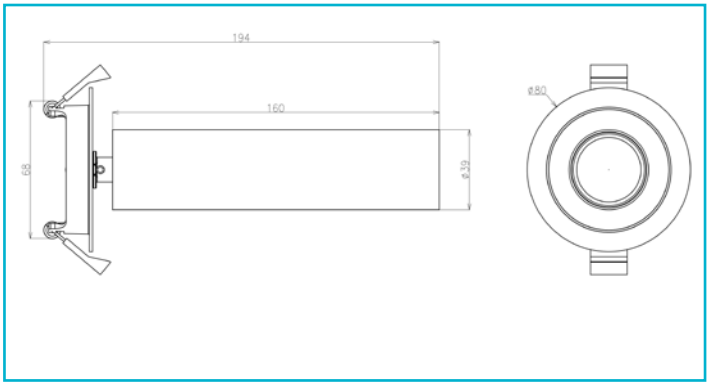

Housing Material	Aluminium
Housing Color	White
Protection Class	Protection class II/protective insulation
Rated Input	5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Light Source	LED, Light source changeable TC
Color Temperature	2700 K
Colour Consistency	3 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	500 lm
Luminous Efficiency	100 lm/W
Rated Angle of Reflection	36 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Swivel Angle	60 Degree
Rotation Angle	300 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	194 mm
Diameter	80 mm
Cut Out Diameter	68 mm
Product weight	273 g

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 65 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	5 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.

Deko-Light Elektronik-Vertriebs GmbH
Auf der Hub 2 | D-76307 Karlsbad
www.deko-light.com
deko@deko-light.com