
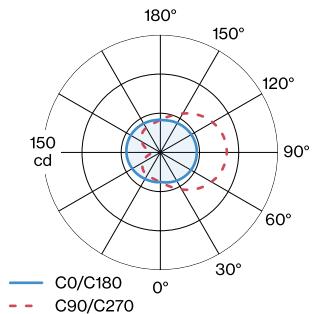



PROJECT
TYPE
NOTES
QUANTITY
DATE

IP44


Round light sphere with diffuse light; for mounting on the mirror (2-7 mm) using a clip; white opal glass; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95 ; degree of protection IP44; Class 1; UGR ≤ 19 ; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Wall
Surface
White Opal Glass
IP44
Interior
580 lm
CIE flux code: 23 48 74 49 100

LIGHT DISTRIBUTION

LED

4000 K
CRI ≥ 95
L80 / 60000 h
initial MacAdam ≤ 2 SDCM

OPTICAL


Opal

ELECTRICAL

phase-cut dim
220 - 240 V
system 8.3 W
Class 1

PHYSICAL

length 130 mm
width 86 mm
height 130 mm
0.46 kg



[392484W7] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com


Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.93	0.9	0.86	0.82
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMFa	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMFa ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.